

□□□ □□ **B091** □□□ **CE** □□□ □□□ □□, **CPSC** □□□□.

□□ □□

1. □ □□□ PC □, □□ □□□ □□ □ □□□.
 2. □□□ □□□ EPS □□, □□, □□□, □□□□ □□□ □□□□.
- □□, PA □□, □ □□ 3..
4. □□□ □□ □□ □□ □□□ □□□□.
 5. [□□□ □□□ □ R & A](#), □□ □□ □□ □□□□□.

□□ □□ **roduct**

Product Detail



□□ □□ □□

| | | |
|---------------|---|---|
| □ | □□ | □□ □□ |
| 1. □□ □□ | □□ □□□ □□ | Causl □□, □□ □□□ □□ |
| 2.Model □ | BD04 | |
| 3.Material | PC □□ □□ □□ + EPS, □□ □□ □□□, □□□ □ □ □ ITW□ headkey headring □□ | EPS □□ □□, EPS + PC□ inmould □□, □ □ □□ □□ □□ □ □; □ □□ □ □; □□ □□ □□ |
| 4. □□□ | □□□ □□□ | □□ □ □□□ □□□□ □□ □ □ |
| 5. □□ | □□ pantone □□ | □□ pantone □□ |
| 6. □□ | S / M (54-58cm) M / L (58-62CM) | □□ □□ □□ □ □□□ □□ |
| 7. □□ | □□□ □□, □□ □□, □ □□ □ | |
| 8. MOQ | 300PCS □□ □□ 500 □ □ □□ | |
| 9. □□ □□ | 73 * 58 * 35CM | |
| 10. □□ | 12PCS / CTN 10PCS □□□ CTN | |
| 11. □□ □□ | □□ □□ | |
| 12. □□ □□ | □□ □□ □□ □□□□ □□ | |
| (13) □□ □□ | □□□ T / T, □□□ □□□, L / C | |
| (14) □□ □□ | 4-7 | □□□ □□ □□ □□□□ □ |
| (15) □□ □□ □□ | 20~30□ | □□ □□ □□□ □□ □, □□ □□ □□□ □□ |

□□ & A; □□

Packaging




Items per Carton: 12 Pieces/Carton

Package Measurements: 73X58X35 cm

Gross Weight: 6.50 kg

Package Type: 1PCS/PP bag wth color box, 12 PCS PER BROWN CARTON

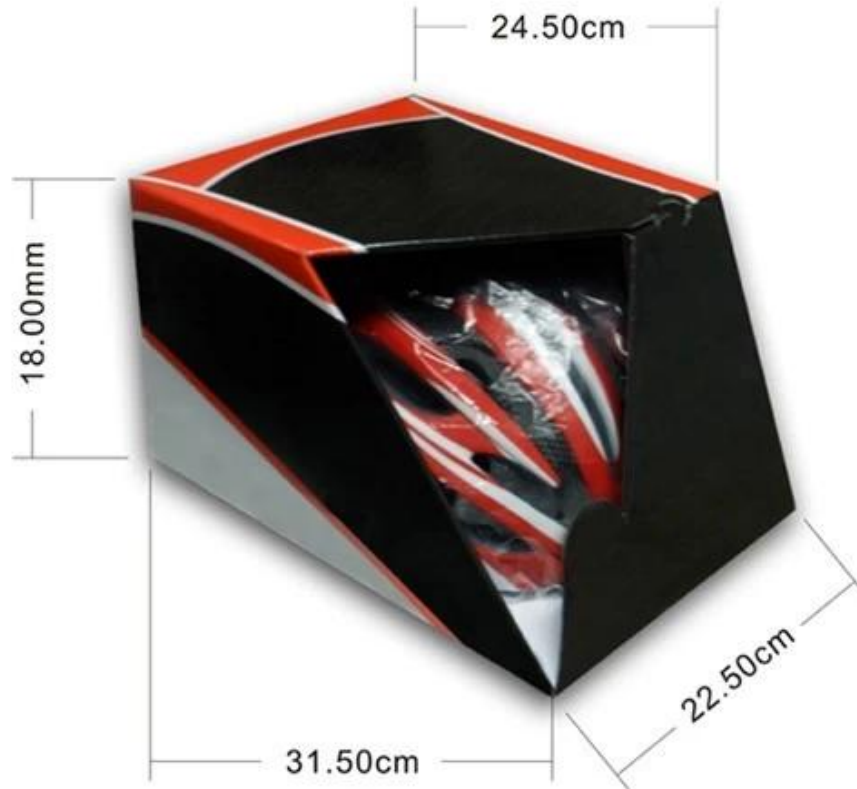

□□□ □ A; □□

“Testing Procedures”



The Impact force detected



Field of Vision Testing


Every manufacturing steps at AURORA follows adhere to strict quality parameters and focus on quality throughout the each stagesinvolved. All raw material and semi finished goods at AURORA pass strict quality control. The finished product, helmets at Aurora is then tested and qualified to export to the world.



Static Stability Testing



Head type detection



Head Circumference Testing



Conditioning Tests



Shock Absorbing Capacity



dynamic strength test

SHIPPING

