

CE AU-K003 ABS

CE ABS

11 - 7 / 2 / 2

300

EPS&038; ABS;

S5155 M 5659 L 6062

27.5 * 22.8 * 16.8 81 * 65 * 48

MOQ 500 PCS;

CPSC CE EN1078;








“Testing Procedures”



The Impact force detected

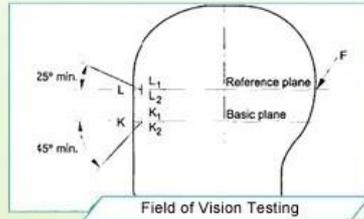


Field of Vision Testing


Every manufacturing steps at AURORA follows adhere to strict quality parameters and focus on quality throughout the each stagesinvolved. All raw material and semi finished goods at AURORA pass strict quality control. The finished product, helmets at Aurora is then tested and qualified to export to the world.



Static Stability Testing

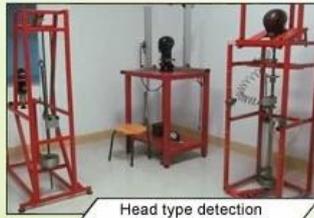

Head type detection



Head Circumference Testing



Conditioning Tests



Shock Absorbing Capacity



dynamic strength test

□□□□□□□□□□

- ASTM F1447-06
- ASTM F1952-09
- ASTM F1492-08
- ASTM F1898-08
- ASTM F1163-04a
- ASTM F2040-11
- ASTMF1045-2007
- CPSC 1203
- BS EN1078□2012
- BS EN1080□2002 + A2□2005 + A1 1997
- BS EN1384□+ A1□1997 2002
- BS EN1077□2007
- BS EN1385-1998 + A1□2005
- EN ISO10256□2003
- AS / NZS2063-2008 + A1□2009
- 2006□/ NZS3838 AS

