

ce



1. pc 時間
2. eps 誤差
3. pa 精度
4. 時間
5. r & d 時間

product

Product Detail



0000

00	00	00000
1. 000	000000000000	Causl 000000 00000000000
2. 0000	b091	
3. 00	pc + eps 00000000000000000000 0000 0 itw 00000, 00000000000, 0000000 000	eps 00000, eps + pc inmould 00000, 00000000000000000000000000;000000 0;0000000000 eps 000000eps + pc inmould 000000000000000000 000000000000;0000000 0;0000000000-0000 0000: http://www.aurorasport.com/bicycle-helmet/193.html#sthash.j25DBJel.dpuf
4. 0000	00000000	0000000000000000
5. 0 5. 0	000000000	000000000
6. 000	s/m (54-58cm;m/l (58-62cm)	000000000000000000
7. 00	000000000000000000	
8. moq	500 pc 000300pcs 00	
9. 00000000	73 * 58 * 35 00000000	
10. 00000	/ctn 000000 ctn	
11. 00000	fob/exw	
12. 0000	00000000000000	
13. 0000	0000 t/t000000000000/c	
14. 000000	4-7	00000000000000
15. 00000000	20-30 0	00000000000000000000000000000000

00000

Packaging




Items per Carton: 12 Pieces/Carton

Package Measurements: 73X58X35 cm

Gross Weight: 6.50 kg


Package Type: 1PCS/PP bag with color box, 12 PCS PER BROWN CARTON

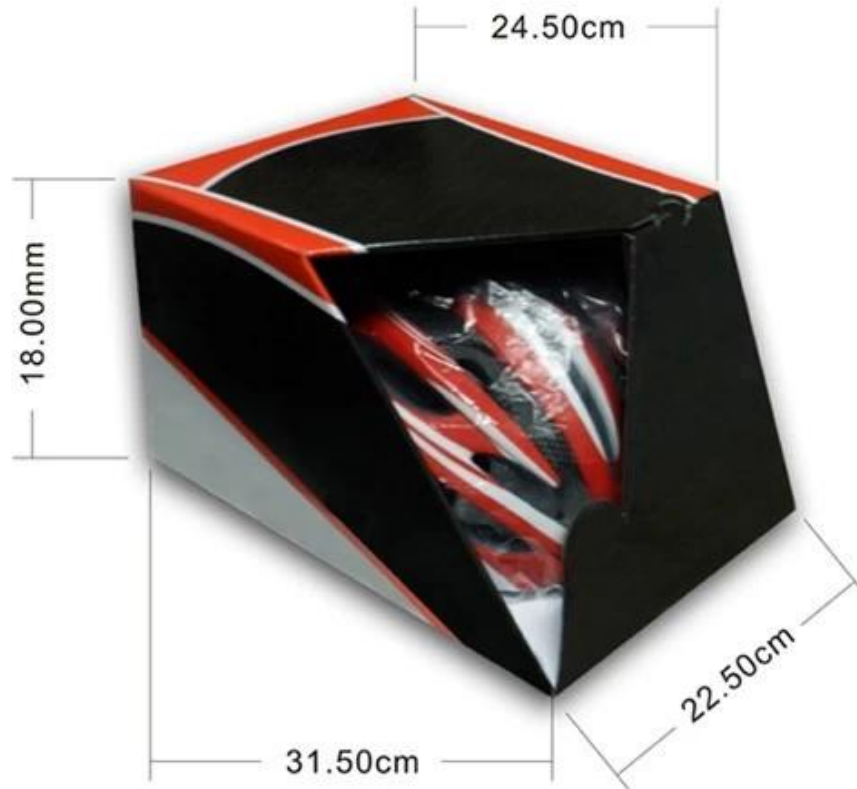

“Testing Procedures”



The Impact force detected

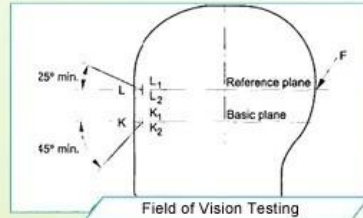

Field of Vision Testing


Every manufacturing steps at AURORA follows adhere to strict quality parameters and focus on quality throughout the each stagesinvolved. All raw material and semi finished goods at AURORA pass strict quality control. The finished product, helmets at Aurora is then tested and qualified to export to the world.



Static Stability Testing



Head type detection



Head Circumference Testing



Conditioning Tests



Shock Absorbing Capacity



dynamic strength test

CERTIFICATE / AUTHENTICATION



11

