□□□□□□□□□□□□□□CE□□□□□□□□□□□□□□□□□□PETZL□□□

HELMETS

Nine color ways

AU–MO2

Safety helmet | 375g | EN 397 | ANSI

Safety helmet is well ventilated with PP shell and 4 point webbing suspension system. The helmet comes with 4 clips carrying external headlamps, a new Up-N-Down size adjustment system with a central ratchet wheel and two lateral finger push winglets for an ultimate fit.
ATTENTION: as a polypropylene material, it is a MOQ requirement to custom your own color, however, there is nine fashion color available for you.

WHITE
RED
YELLOW
ORANGE
GREEN
BLUE
BLACK
GREY
PINK

Safety helmet

Work at height | electrician | intakes

The helmet comes with ten air intakes which provide efficient cooling and ventilation. The air intakes on the outer shell is equipped with protective aluminum anti-intrusion grille that prevents entry of debris into the helmet. If for electrician who want to have an insulation protection function, the material of intakes could be changed into nylon.

Intakes material:
Aluminum
Nylon

Helmet specification

Norm: EN 397
Outer shell: PP, Polypropylene
Size: universal 51-62cm headform
Weight: (without ear defenders or visor):375g
Attachment of headlamps: nylon clips
Color: white/red/yellow/orange/green/blue/black/grey/pink

□□□ □□□□	AU-M02 □□□ □□□□□
□□ □□	ABS / PP □□□
□□□□ □□	PU □ □□□ 4□ □□□□□ □□□□□□□ □□□□
□□□□□□	PE □□□□□□
□□□ □□□□□□ □□□□	□□ □□□□ 6.6 □□□ □□□□
□□□	30□35□□□□ NRR □□ □□□□□□
□ □□□	□□□□□□□□□□□ □□□□□□ □□□□/ □□□□□□□□□□□ □□□□□□ □□□□/ □ □□□□
□	□□ □□ □□□□□□□□□□□□□□□□□□□□□□□
□□□/□□□ □	51□62□□□□□□□
□□	375 □□□ □□ □□ □□□□ □□□□ □□□□□□□□
□□□	10 □□ □□ □□□□ □□□□□□/ □□□□ □□□□
□□	□□
□□	CE EN 12492 / 397
□□□□ □□	3-7 □□□□□ □
□□□□□□□□	□□□□□□□□□□□□□□□□□□□□

1□ LED□□□□□□□□□□□□□□ □□□□□□□LED□□□□

2□ □□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□ □□□□□□□□□□□□□□ □□□□□□

3□ □□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□□ □□□□□□□□ □□□□□□ □□□□□□

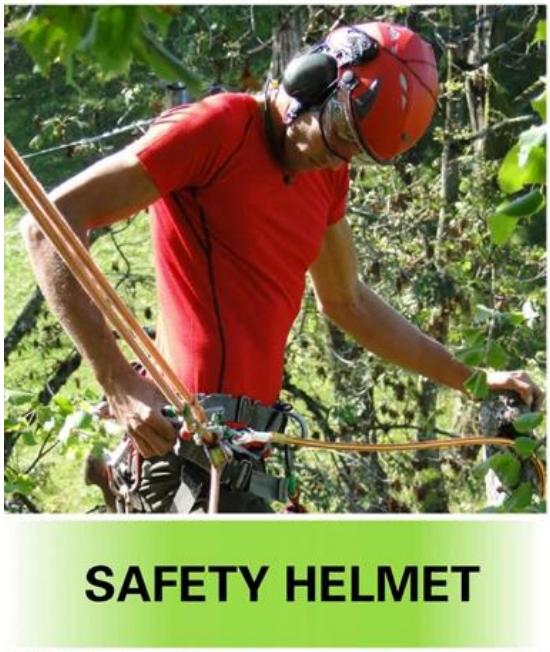
SAFETY HELMET

Helmet accessories available
Safety helmet with LED light.
AU-M02 white
Red
Yellow
Orange
Blue
Green
black
Led light headlamp led light
Safety helmet with ear protection and mesh faceshield
AU-M02 white
Red
Yellow
Orange
Blue
Green
black
earmuff good sound insulation
faceshield iron mesh
Safety helmet with plastic visor
The set is compatible with our special visor and earmuff.
AU-M02 white
Red
Yellow
Orange
Blue
Green
black
Visor plastic with eye protection
earmuff good sound insulation
NEW

□□□□□□□□□□□□□□

QUICK-RELEASE RATCHET ADJUSTER

New and proprietary Up-N-Down size adjustment system provides the most precise and comfortable fit.

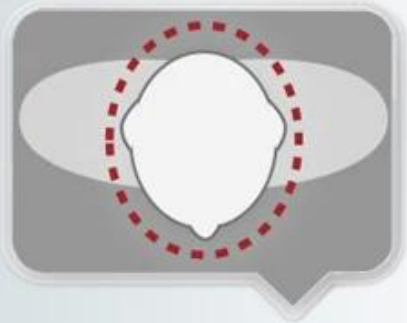

GETTING THE RIGHT FIT

The headform was made according to ISO/DIS 6220 standard, and keeps 90% fitting rate.

NYLON STRAP & CHIN STRAP

Designed to limit risk of
losing helmet during a fall,
side strap-adjustment to assist with a proper fit.

PLASTIC CLIPS FOR LED HEADLAMP

ABS material, very easy to hold the lamp.

SLOT FOR EARMUFF AND MASK
CE standard ear protector ,NRR 28DB
Stainless mesh face shield
Full face protection

□□□□□□□□□□□□□□□□□□□□□□□□

□□□□ □□□□BTS□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

Area of application safety helmets
Power generation
Iron tower
BTS station
Coal mining
Work at height
Petrochemical refining
Offshore oil and gas
Plumber
Cable car maintenance
Mobile plant maintenance
Aircraft Maintenance
Pulp&paper
Civil infrastructure
Sea rescue
Roof Cleaning
Hiking

□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□

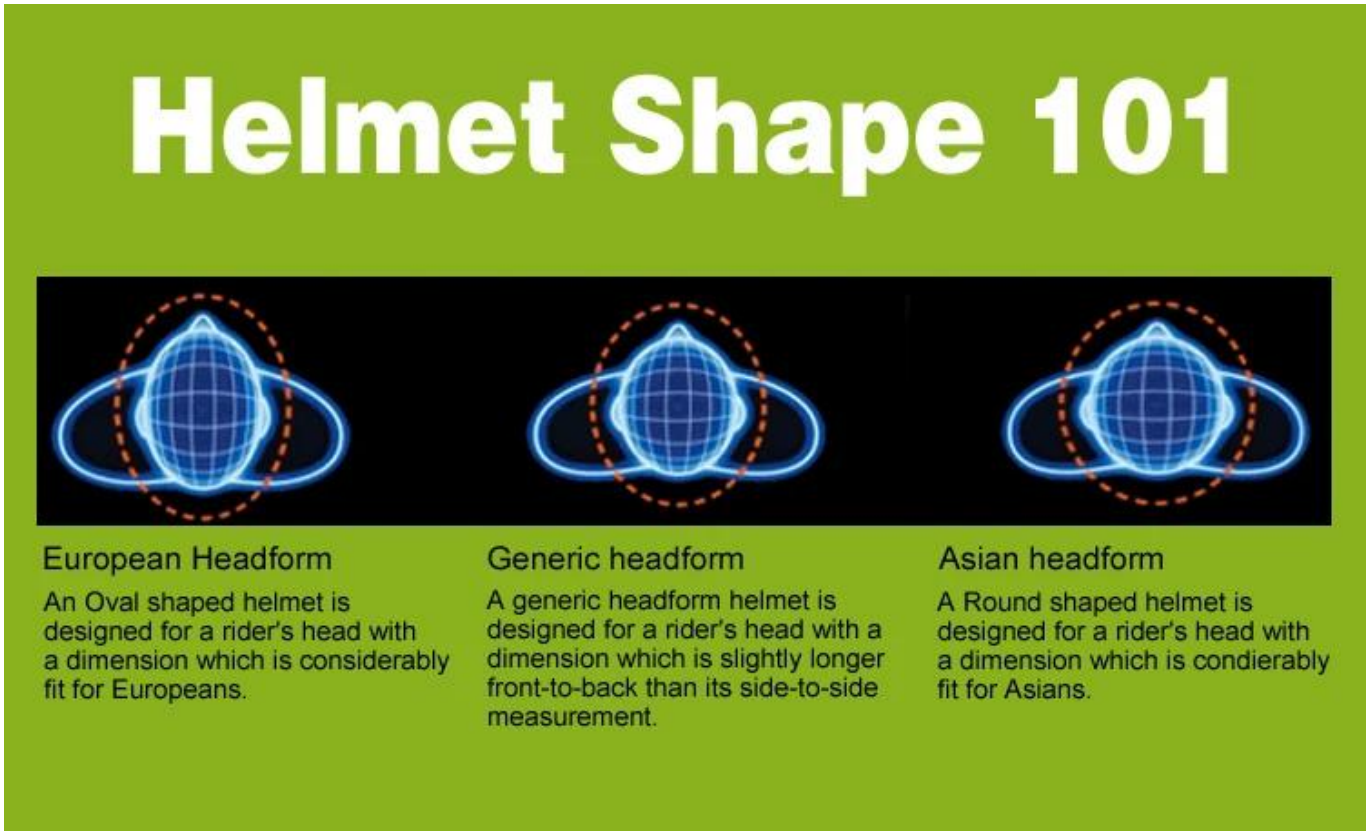
Helmet Shape 101
European Headform
An Oval shaped helmet is designed for a rider's head with a dimension which is considerably fit for Europeans.
Generic headform
A generic headform helmet is designed for a rider's head with a dimension which is slightly longer front-to-back than its side-to-side measurement.
Asian headform
A Round shaped helmet is designed for a rider's head with a dimension which is condierably fit for Asians.

□□□□□□□□□□

□□□□□□□□□

□□□

□□□□□□□□□□□□□□□□□□□□ISO9001□□□□□□CE□□□□□□□□□□□□□□□□□□□

CERTIFICATE

□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□15□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□R&□038;□□□□□□□□□□□□D□□□□□□□□□□□□□□□□□□□

CUSTOMIZE FOR BRAND

□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□ → PC□□□□□□□□□□□□ → PC□□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□EPS□□ → □□□□□□EPS□□□□□ → □□□□□ □□□□□□□□□□□□□ → □□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□□□□□□ → IQC□□ → □□□□□□□ → □□□ □□□□□□□ → □□□□□□□□□□□□□□□□ → □□□□□□□ →□□□□□□□ → □□ → □□ → □□□□□□□□□□□□□□

Production Procedure
AURORA
1
Silk screen
2
PC blister tooling
3
PC blister manufacture
4
Trmming dug hole
5
Eps raw material by different density
6
EPS in-mold tooling
7
Helmet in-mold workshop
8
In-mold machines
9
In-mold tooling
10
In-mold producing process
11
semi-finished In-mold helmet
12
IQC inspection
13
Helmet grinding
14
Inner padding production
15
Plastic injection workshop
16
Assembly line
17
Inside labeling
18
Packing
19
Warehourse
20
Installed counters

□□□□□

□□□□□□□□□□□□□□&□038;□□□□□□□□□□□□□□

SHIPPING