□□□□□□□

- □□□□: □□
- □□□□ < 8
- □□: EPS
- □□: CE CE EN1078
- □□ (g): 225 g
- □□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
- □□□: XS(45-50CM)□S(50-55cm)□M(54-58cm)□XS(45-50CM)□S(50-55cm)□M(54-58cm)
- □□□□□: □□□□□□ (□□)
- □□□□□: □□□□
- □□□□□: AU C06
- □□□: □□□□ EN 1078 □□□□□□□□□□□□
- □□: □□ (1 □□□□)
- □□: 225 g
- □□: 6 □□
- □□□□: □□□□□□□□□□□□□□□, □□, □□□□
- □□: □□□□
- OEM MOQ req: 500 □

□□□□□

□□□□ EN 1078 □□□□□□□□□□□□
□□□□□□□□□: 1. PP □□□□PVC □□□;□□□□□ □□□□□□□ □□□□□□□□□ □□□□□□□□□□□
2 □□□□□□
□□□□□: □□□□□ 30 □□□□□□□□□□□□□□□□□□□

□□□□□

□□□□

□□□□□	□□□□ EN 1078 □□□□□□□□□□□□
□□□:	XS(45-50CM)□S(50-55cm)□M(54-58cm)
□	□□□□□□□□□□□□□□□□□
□□	PC □□□ EPS □□□□
MOQ	500 □
□□	CE EN 1078

□□□□□□□□□□□□□□

□□□□□□□□□□□	□□□□□□□□□□□□□□□
□□□□□□□□□	10-15 □□□□□□□□□□□□□□□□□□
□□□□ □□□□□□□□□	□□□ 1.5 □
□□□□□□□□□□□□	3 □□□□

□□□□□	PAYPAL □□□ T/T

□□

□□□□□□□□□:

□□□□□□□□□

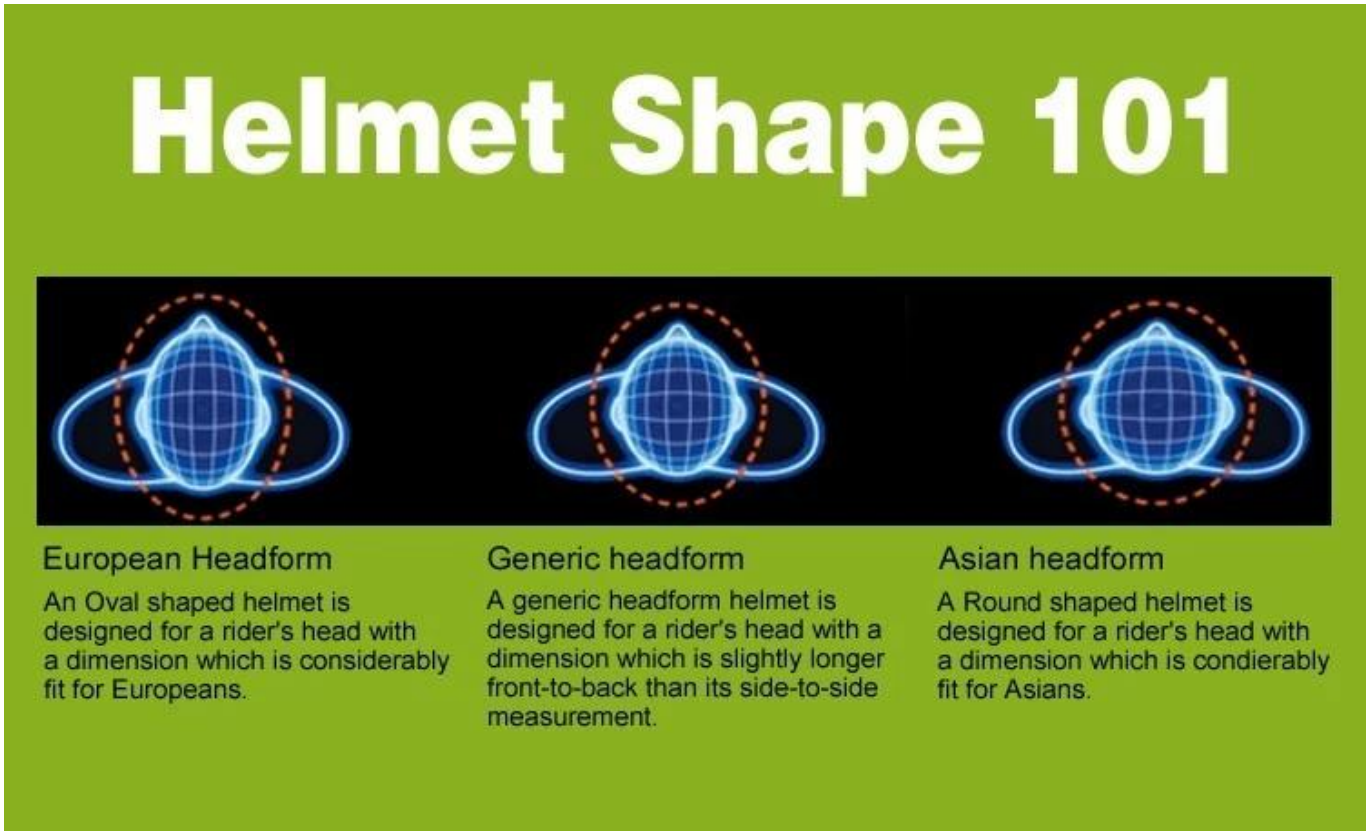
Helmet Shape 101
European Headform
An Oval shaped helmet is designed for a rider's head with a dimension which is considerably fit for Europeans.
Generic headform
A generic headform helmet is designed for a rider's head with a dimension which is slightly longer front-to-back than its side-to-side measurement.
Asian headform
A Round shaped helmet is designed for a rider's head with a dimension which is condierably fit for Asians.

□□□□

□□□ □□□□ □□□□□□□□□□□22 □□□□□□□2012 □□□□□□□

□□□□□□ □□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□

Production Procedure
AURORA
1
Silk screen
2
PC blister tooling
3
PC blister manufacture
4
Trmming dug hole
5
Eps raw material by different density
6
EPS in-mold tooling
7
Helmet in-mold workshop
8
In-mold machines
9
In-mold tooling
10
In-mold producing process
11
semi-finished In-mold helmet
12
IQC inspection
13
Helmet grinding
14
Inner padding production
15
Plastic injection workshop
16
Assembly line
17
Inside labeling
18
Packing
19
Warehourse
20
Installed counters

FAQ

1. OEM □□□□□□□□□□□□

□□□□□□□□□□□

□□ □□□□