□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

HOT

New launch ultralight children rock climbing helmet with CE EN12492

Size: XS/S 48-52CM
Weight: 220g
Double in-mold

ASTM INTERNATIONAL
Standards Worldwide

CE

Products

□□□□□ □□□□□□□□□□□□□□□

- CE EN 12492□□□□□□□□□□□□□□□□□□□□□

- □□□□□□EPS□□□□□□□□□□PC□□□□□□□

- □□□□□□PC□□□□□□□□□□□□

- T□□□□□□□□□□PC□□□□□□PC□□□

- P□□□□□□□□□□□atent□ □□ □□□□□□□

□□□ □□□□	AU-M01 [□□□□□□□□□]
□□ □□	□□□□□□PC□□□+□□□PC□□□
□□□□ □□	□□□EPS□□□□+□□□□□□□□□
□□□□□□	PE □□□□□
□□□ □□□□□□ □□□□	□□ □□□□□□□ □□□□
□	□□□□
□□□/□□□ □	□□8-12□□□□□48□52□□□□□□□
□□	220 □□□
□□□	14 □□ □□
□□	□□□□□□□□□
□□	CE EN 12492
□□□□ □□	3-7 □□□□□ □
MOQ	200 PCS
□□ □□	1.PP □□□□ PE □□□□ □□□□□ □□□□ □ □□□□ □□□ □□□□□□ □□□□ □□□□□□□
	2□ □□□□ □□ □□

□□□□□□□□□□□□□□□□□□

DOUBLE IN-MOLD CONSTRUCTION

It places impact-resistant EPS foam on the inside of the helmet which is then surrounded by a durable polycarbonate outer shell for strength and puncture resistance.

HEAD LOCK ADJUSTMENT

Quick release headring system, made by Nylon material.

SOFT WASHABLE PADS
Ergonomic interior padding for comfort and durability

LED HEADLIGHT
PLASTIC CLIPS FOR LED HEADLAMP
ABS material, very easy to hold the lamp.

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□...

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]condierably[illegible]

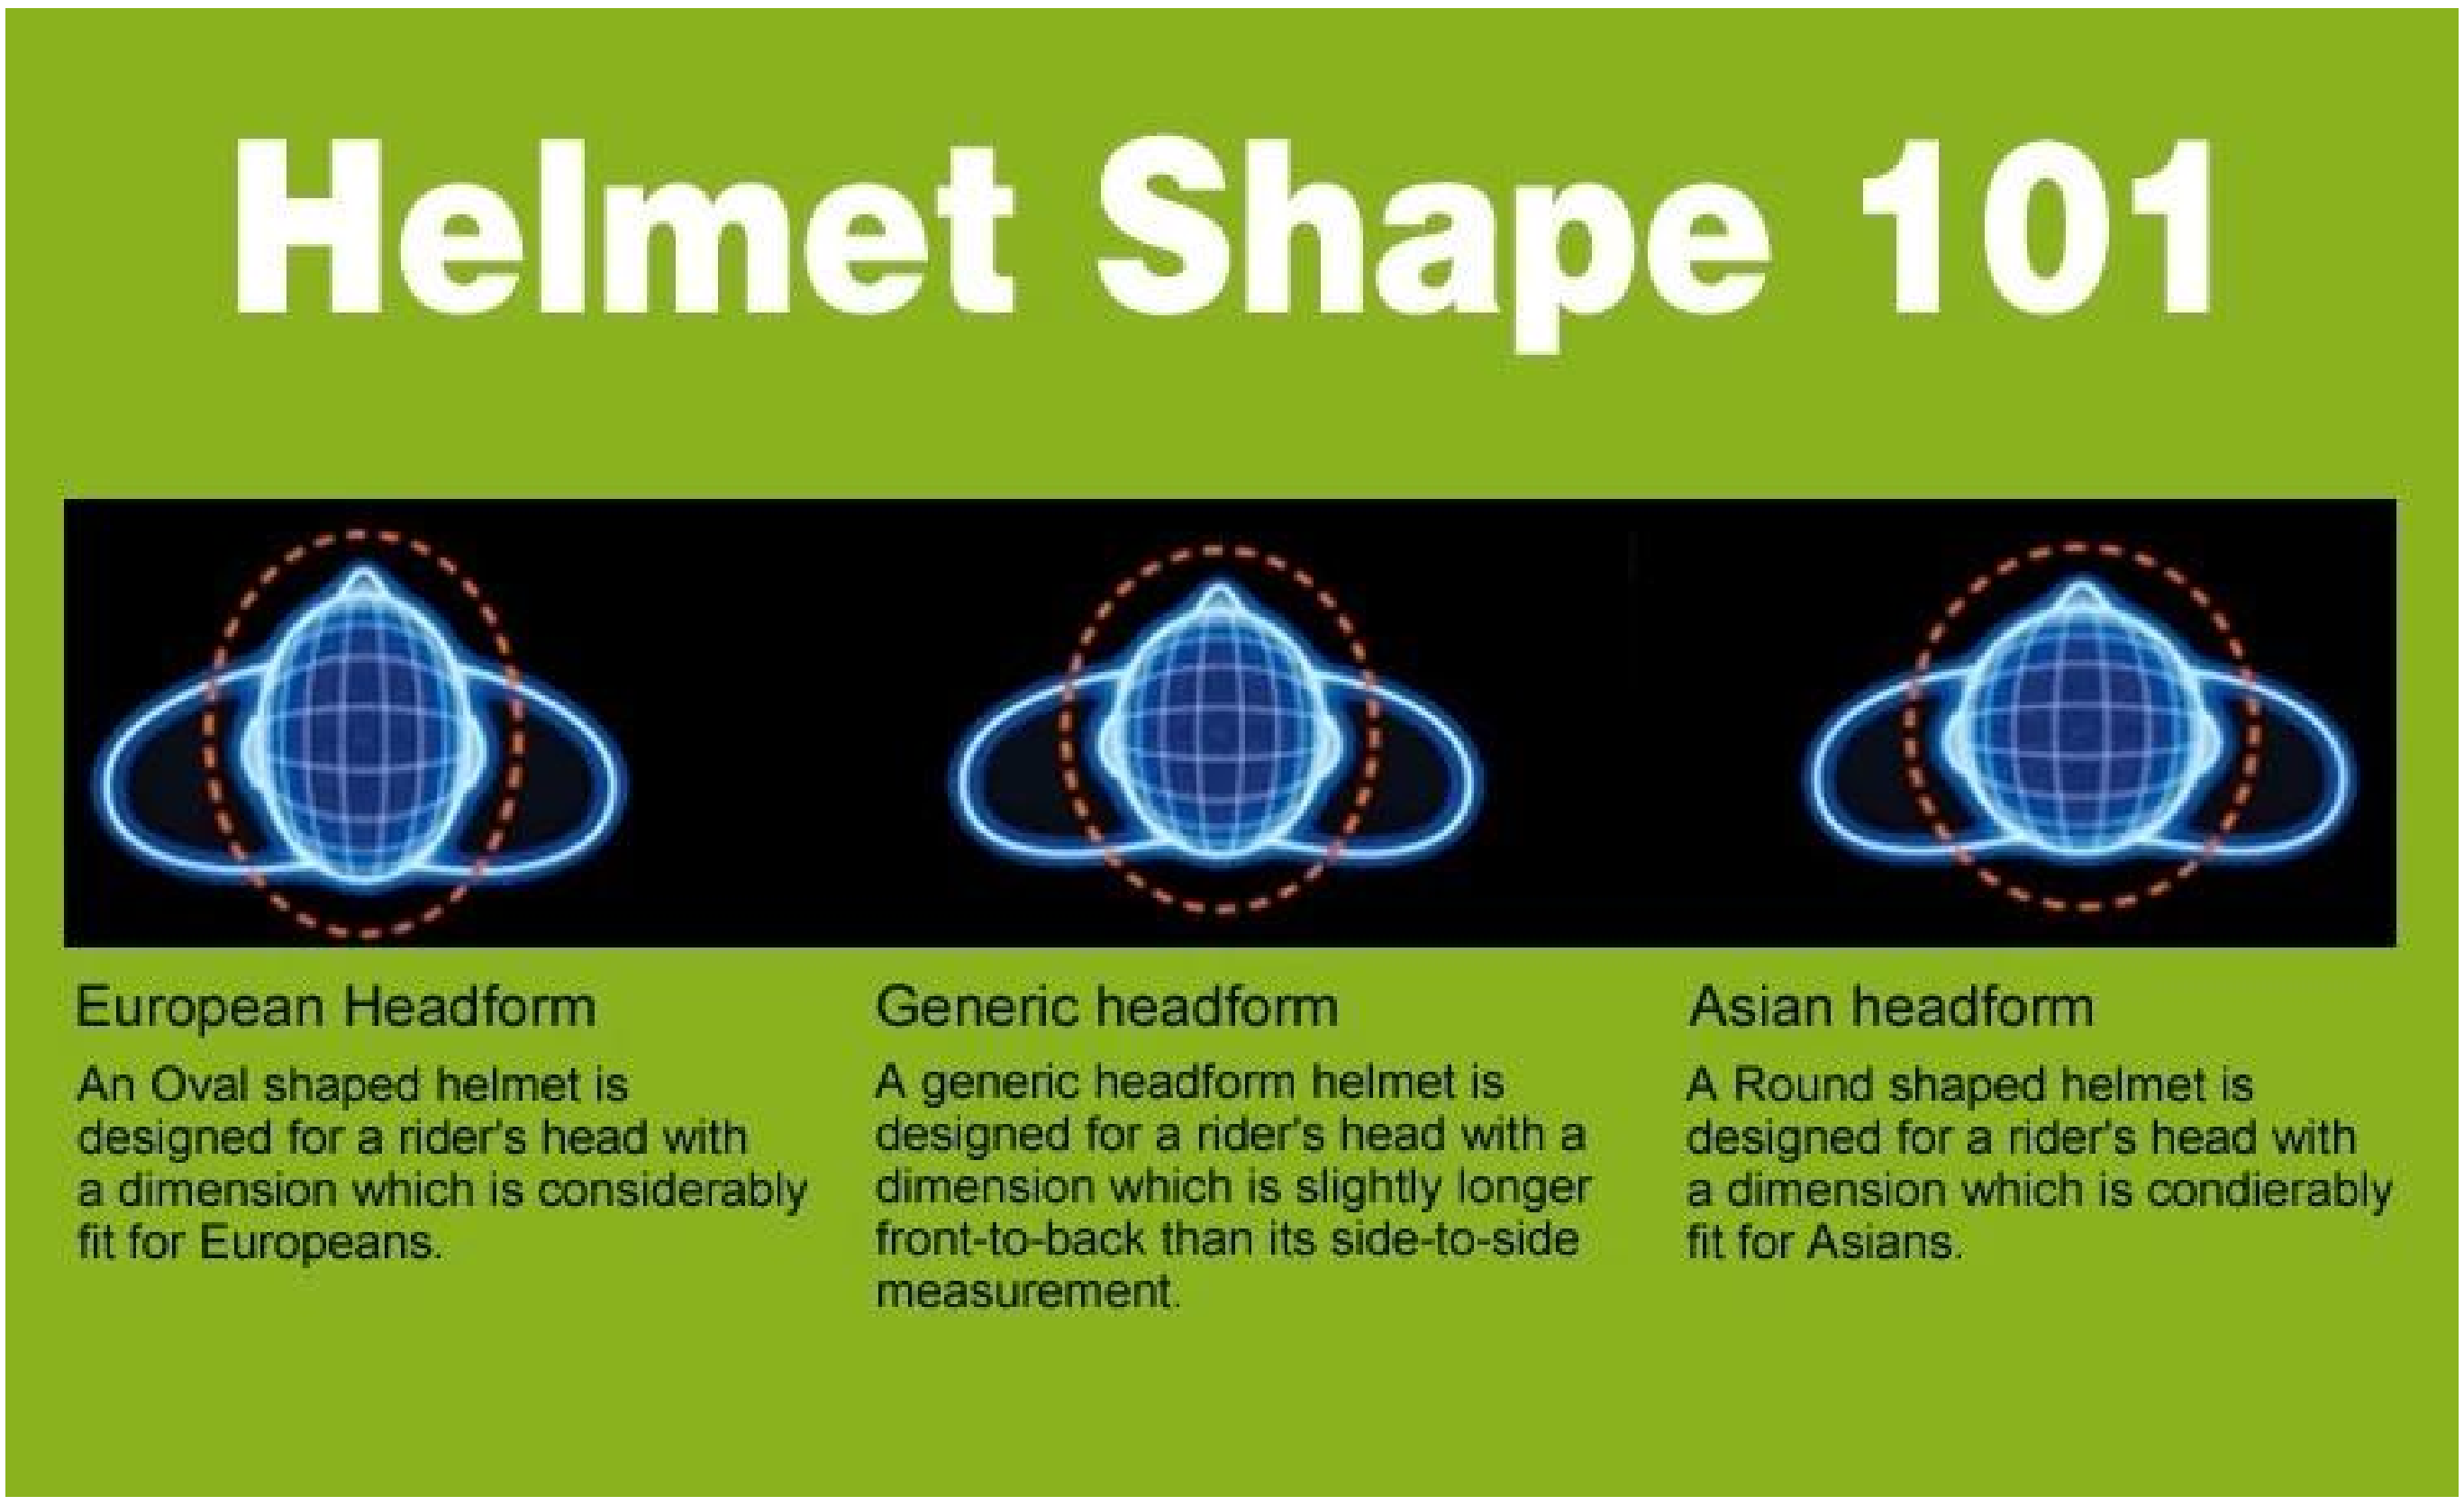
Helmet Shape 101
European Headform
An Oval shaped helmet is designed for a rider's head with a dimension which is considerably fit for Europeans.
Generic headform
A generic headform helmet is designed for a rider's head with a dimension which is slightly longer front-to-back than its side-to-side measurement.
Asian headform
A Round shaped helmet is designed for a rider's head with a dimension which is condierably fit for Asians.

[illegible]

[illegible]&[illegible]

□□□

□□□□□□□□□□□□□□□□□□□□ISO9001□□□□□CE□□□

CERTIFICATE

□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□15□□□□□□□□□□□□□□□□□□□□□□□R&□038;□□□□□□□□D□□□□□□□□□□□□□□□ □□□

CUSTOMIZE FOR BRAND

□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□ → PC□□□□□□□□□□□□ → PC□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□EPS□□ → □□□□□□EPS□□□□□ → □□□□□ □□□□□□□□□□□□□ → □□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□□ → □□□□□□□□□□□□□□□ → IQC□□ → □□□□□□□ → □□□ □□□□□□□ → □□□□□□□□□□□□□□□□ → □□□□□□□ →□□□□□□□ → □□ → □□ → □□□□□□□□□□□□□□

Production Procedure
AURORA
Silk screen
PC blister tooling
PC blister manufacture
Trmming dug hole
Eps raw material by different density
EPS in-mold tooling
Helmet in-mold workshop
In-mold machines
In-mold tooling
In-mold producing process
semi-finished In-mold helmet
IQC inspection
Helmet grinding
Inner padding production
Plastic injection workshop
Assembly line
Inside labeling
Packing
Warehourse
Installed counters

[illegible]

[illegible]&[illegible]038;[illegible]&[illegible]&[illegible]

SHIPPING