

LED, AU-M02



Application field

:

| | |
|-----|-------------------|
| | AU-M02 |
| | ABS / PP |
| | EPS |
| | |
| | 4.1 |
| | 30-35dB NRR |
| | PC / PC / |
| | , , , , , , , |
| / | 51-62cm |
| | 375 () (Muffs) |
| | (10) / |
| | |
| | CE CS 12492 / 397 |
| | 3-7 |
| MOQ | (200) PCS |

| | |
|-------|---|
| □□ □□ | 1. PP □□, □□ □□, □ □□□ □□, □ □ □□ □ □□ □□ □□□□. |
| | 2. □□ □□ □□ □ □□ |

□□□ □□□ □□ □□ □□ :


| □□ | □□ □□ | □ □□ | □ □□ | □ □□ | □□ □□ |
|-----|-------|---------------|----------|---------------|--------|
| □□□ | □□ | 168 □□ 30□□ | 4270 CD | 110m□ □□ (30) | 30 (H) |
| | □□ | 76 \$ (55) □□ | 1970 CD | 65m 55□□ | 55 □□ |
| | □□ | 120□□ 11 □□ | (310) CD | 9m 120□□ | 120 □□ |
| | □□ □□ | 17 □□ | ...□ | ...□ | ...□ |
| □□ | □□ | ...□ | ...□ | 8m 80 (H) | 80 □□ |
| | □□□□ | ...□ | ...□ | ...□ | ...□ |

□□ □□ 100 % A □ □□ □□□□; A; A; □ □□□

- ◆ □□ : 62 * 37 * 48mm
- ◆ □ □□ : (□□□ O / w) 50g
- ◆ □□ : □□□ □ □□□ R3 & A; A; A; Ø5mm □□ (□□□ □□□)
- ◆ □□□ : □□ / □□ / □□
- ◆ 1.5-3 m□ ◆ □□ □□
- ◆ □□ □□ : DC 4.5 V
- ◆ □□ □□□ : 3 AAA □□□
- ◆ □□ □□ : □□ PC
- ◆ □□ : IPX6 (□□)





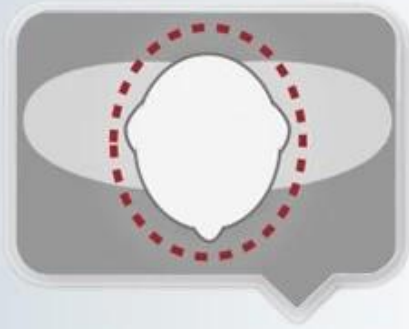

GETTING THE RIGHT FIT

The headform was made according to ISO/DIS 6220 standard, and keeps 90% fitting rate.



QUICK-RELEASE RATCHET ADJUSTER

New and proprietary Up-N-Down size adjustment system provides the most precise and comfortable fit.



NYLON STAP & LEATHER CHIN STRAP

Designed to limit risk of losing helmet during a fall, side strap-adjustment to assist with a proper fit.



SOFT WASHABLE PADS

washable and interchangeable sweat band.

□□□ □□□ □□ □□ □□ □□ :

□□, □□ □□, □□ □□ □ □□, □□□, □□□□ □□ □□, □□□□ □□ □□ □□, □□□□ □□ □□, □□ □ □□, □□ □□□□□□ □□ □□□□□ □□, □□, BTS, □□ □□, □□, □□ □□, □□ □□, □□□□ ...

Area of application safety helmets



Power generation



Iron tower



BTS station



Coal mining



Work at height



Petrochemical refining



Offshore oil and gas



Plumber



Cable car maintenance



Mobile plant maintenance



Aircraft Maintenance



Pulp&paper



Civil infrastructure



Sea rescue



Roof Cleaning



Hiking

□□ □□

□ □□□ □□ □□□□ □□□ □□□ □□ □ □ □□□ □□ □□ □□ □□□□□□□□. 18PCS / CTN □□ □□ : 26 * 21.5 * 11.5cm
 mastercarton : 80 * 45 * 44cm □ 20□□ □□ □□ : 2500pcs

Packaging



18pcs/ctn

color box: 26*21.5*11.5cm

mastercarton: 80*45*44CM

20ft Loadability: 2500pcs



The pack box was designed especially for safety helmet which can be greatly to save the space and protect the helmet.

包裝規格 :

包裝規格說明：包裝規格說明：包裝規格說明，包裝規格說明包裝規格說明，包裝規格說明！包裝規格說明包裝規格說明 EN1078, EN397, EN12492, CPSC 包裝規格說明。包裝規格說明包裝規格說明，包裝規格說明 & A 包裝規格說明；包裝規格說明包裝規格說明！

Our In-house Testing Lab



□□:

□□□ □□□□□□ : □□□ ISO9001, □□ □□, CE □□□ □□□, □□□ □□□ □□ □□□ □□ □ □□□ □□ □□□ □□ □□□ □□□□□

CERTIFICATE / AUTHENTICATION



00 00 0000 0000 00 :
 00 00 → 0000 → 00 0000 → PC 00 00 → PC 00 0000 00 00 00 → EPS 00 00 00 EPS - 00 00 → 00 00 0000 → 00 00 00 → -
 00 00 → - 00 00 00 → 0000 - 00 00 → IQC 00 → 00 00000 00 0000 → 00 00 → 00 00 00 → 00 → 00 → 00 0000 → 00
 00 → 00.