

□□ □□□ □□ □□□ □□□ □□, □□ □□□ □□, □□□□ □□□ □□ □□□ □□

□ □□□ □ □□□ □□□ □□ :

1. □□ □□□□ □□□ □□□□□□.
2. 3 □□ □□ □□□□ □□□□ □□ □□ □□□ □□ □□ □□□ □□□□, □□ □□□□ □□ □□□.
3. □□□ □□□□ : □□□ □□□□ □□ □ □ □□ □□□□□.
4. □ □□ □□ : □□□ □ □□□□ □□, □□ □□ □□ □ □.
5. □□□□ PC □.
6. □□ EPS □□□ □□□□ □□□□.
7. □□□ □□□□ : □□ □□□ □□ □□ □ □; □□□ □□□ □□.
8. □□ : CE-CPSC-ASTM-AS / NZS-TUV-EN1078 □□ □□□ □□ □□.

□□ □□

1. □ □□□ PC □, □□ □□□ □□ □ □□□.
 2. □□□ □□□ EPS □□, □□, □□□, □□□□ □□□ □□□□.
- □□, PA □□, □ □□ 3..
4. □□□ □□ □□ □□ □□□ □□□□.
- [D □□, 5. □□□ □□□ □ R & A□, □□ □□ □□ □□□□□.](#)

□□ □□

Display From Different Perspectives



produ

□	□□	□□ □□
1. □□ □□	□□ □□□ □□	□□□ □□, □□□ □□, □□ □□□ □□, □□ □□□ □□, □□ □□□ □□, □□□ □□□ □□ □□ □□□ manufacturer
2. □□ □□	BD02	
3. □□	PC + EPS	EPS □□ □□, EPS + PC□ inmould □□, □ □□□ □□ □□ □ □; □ □□ □□; □ □ □□ □□
4. □□□	□□□ □□□	□□ □ □□□ □□□□ □□ □□
5. □□	□□ pantone □□	□□ pantone □□
6. □□	S / M (54-58cm) M / L (58-62CM)	□□ □□ □□ □ □□□ □□
7. □□	□□	□□ □□ □□ □□□ □
8. MOQ	300PCS □□ □□ 500 □ □ □□	
9. □□ □□	73 * 58 * 35CM	
10. □□	12PCS / CTN	10PCS □□□ CTN
11. □□ □□	□□ □□	
12. □□ □□	□□ □□ □□□ □□	□□□
(13) □□ □□	□□□	T / T, □□□ □□□, L / C
(14) □□ □□	4~7□	□□□ □□ □□ □□□□ □
(15) □□ □□ □□	20~30□ □	□□ □□ □□□ □□ □, □□ □□ □□□ □□

□□□ headform □□

□□□ ISO / DIS 6220 □□□ □□ □□□, □□□ □□□□ □□□ □□□ □□□ □ ... □ LIMAR□□ □□ □□ □ □□ □□□□□ 22 □ □□ □□□□ □□ □ 95 %□ □□□ □ □□□ □□ □□□ headform□ □□.

Helmet Shape 101



European Headform

A long Oval shaped helmet is designed for a rider's head with a dimension which is considerably longer front-to-back than its side-to-side measurement.

Intermediate Oval

An intermediate Oval shaped helmet is designed for a rider's head with a dimension which is slightly longer front-to-back than its side-to-side measurement.


Asian head form

A Round Oval shaped helmet is designed for a rider's head with a dimension which has an equally long front-to-back measurement as side-to-side measurement.

“Testing Procedures”



The Impact force detected

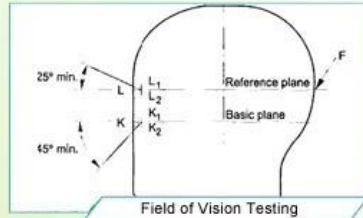

Field of Vision Testing


Every manufacturing steps at AURORA follows adhere to strict quality parameters and focus on quality throughout the each stagesinvolved. All raw material and semi finished goods at AURORA pass strict quality control. The finished product, helmets at Aurora is then tested and qualified to export to the world.



Static Stability Testing



Head type detection



Head Circumference Testing



Conditioning Tests



Shock Absorbing Capacity



dynamic strength test



□□□□□□

□□ □ □□ □□□ □□ □□□□ □□□ □□ □□□ □□□ □□ □ □□.

1. OEM □□□ : □□□ □□ □ □□□□ □□ □□/□□ □□ □□□.
2. Customized □□□ (1) □□□ □□ □□ : □□□ AI □□□ □□ □ □□ □□□ □□ □ □□□□.
- (2) □□□ □□ □□□ : PDF □□ □□ □□□□ □□ □□□ □□□□□.
- (3) □□□ □□ □□□□ : □ □□ □□□ □ □□ □□ □□□ □□□□.
3. □□ □□ : Constantly □□□□ □□ □□ : □□ □□, □□ □□ ...

Logo style: Dome, Metal, UV-Dart sticker, Water decal..



QUALITY
With strict quality management system and first-class products



OEM&ODM
We can provide OEM and ODM service for customers



R&D TEAM
With professional and strong technical development team



PRICE
We have our own production line, to reduce the price to a minimum



PATENT
We constantly introduce patented technology products



SERVICE
Perfect after-sales service, so customer satisfaction

00 00

00 000 000 000 2012 00 22 0 000 000 0000.
00 000 000 00 000 000 00.
0000 00, 00000 00, 00 0000 0000 000 0 00 00 0000 00 0 00000.
OEM 0 ODM 0000 0000. 0000 00 0 R & A, D 00 00 0000 00 0 00 00000 000000.
99 %0 00 0 0000 00 0000 00, 00, 00, 00 0000
0000 0000 00 00000 0000 0000 00 0000 000000 00 0000 00 00000.
0000 00000 0000 00 0 0000 00 0000 00.
0000 0 00000 0000 00 00 000000 : <http://www.helmetsupplier.com>

