□□ □□ □□ □□, CE □□ □□ □□□□ □□ □□ □□ □□

□□ □□.	AU-M02 □□ □□
□□ □□	ABS / PP □□
□□ □□	PU □□ □, 4 □ □□ □ □□ □□
□□□	□□ □□□□□
□□ CARRING □□	□□ □□□ 6.6 □□ □□
□□□ □ □□□	30-35dB NRR □□ □□□
□□ □□□	PC □□□□ □/ PC □□□□ □□□□/ □ □□
□	□□, □□, □□, □□, □□□, □□, □□□, □□
□□ / □□ □□	51-62cm
□□	375 □ (□ Muffs□ □□ □□ □□)
□□	(10) □□ □□ □ □□□□/ □□□ □□
□□ □□	□□
□□	CE EN 12492 / 397
□□ □□	3-7 □ □
□□ □□	□□□ □ □ □□, □□ □□ □□, □ □□ □□ □□□, □□ ITW □□□□ □□□ □□□
□□ □□	1.PP □□, □□ □□, □□ □□, □ □□ □ □□ □□ □□ □□□□.
	2. □□ □□ □□ □□

□□□ □□ □□ □□□□:

1) LED □□ □□ □□ □□: □□ □□ LED□ □□.

2) □ □□□ □□ □□ □ □□ □ □□ □□ □□□: □□□ □ □□□ □□ □□ □□,□ □□ □□ □□□ □ □□.

□) □□□□ □□□□ □□ □□ □□□ □□□□ □□□ □□□ □□□□ □□□: □ □□ □□ □□□□ □□,□□□ □ □□□ □□ □□ □□.

SAFETY HELMET

□□ □□□ □□ □□ :

QUICK-RELEASE RATCHET ADJUSTER

New and proprietary Up-N-Down size adjustment system provides the most precise and comfortable fit.

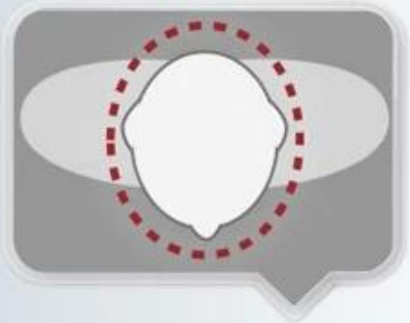

GETTING THE RIGHT FIT

The headform was made according to ISO/DIS 6220 standard, and keeps 90% fitting rate.

NYLON STRAP & CHIN STRAP

Designed to limit risk of
losing helmet during a fall,
side strap-adjustment to assist with a proper fit.

PLASTIC CLIPS FOR LED HEADLAMP

ABS material, very easy to hold the lamp.

SLOT FOR EARMUFF AND MASK
CE standard ear protector ,NRR 28DB
Stainless mesh face shield
Full face protection

□□ □□□□ □□ □□□ □□:

□□,□ □,BTS □,□□,□□□□ □□,□□ □□ □□□□ □□ □ □□, □□□, □□□ □□□ □□,□□□ □□ □□,□□□ □□ □□,□□ & A, □□,□□ □□□,□□ □□,□ □ □□,□□□...

□□ □□□ □□ □□ □□ :

□□ Headform :

□□□ □□□ □□□ □□□ □□ □□□□ □□□□ □□□ □□ □□□□□□□□ □□□□□.

□□ headform : C

□□ headform □□□ □□□□ □□□ □□□ □□□□ □□ □ □□□ □□□□ □□□ □□ □□□□□□□.

□□□ headform :

□□□ □□□ □□□ condierably □ □□□ □□□□ □□□ □□ □□□□□□□ □□□ □□ □□.

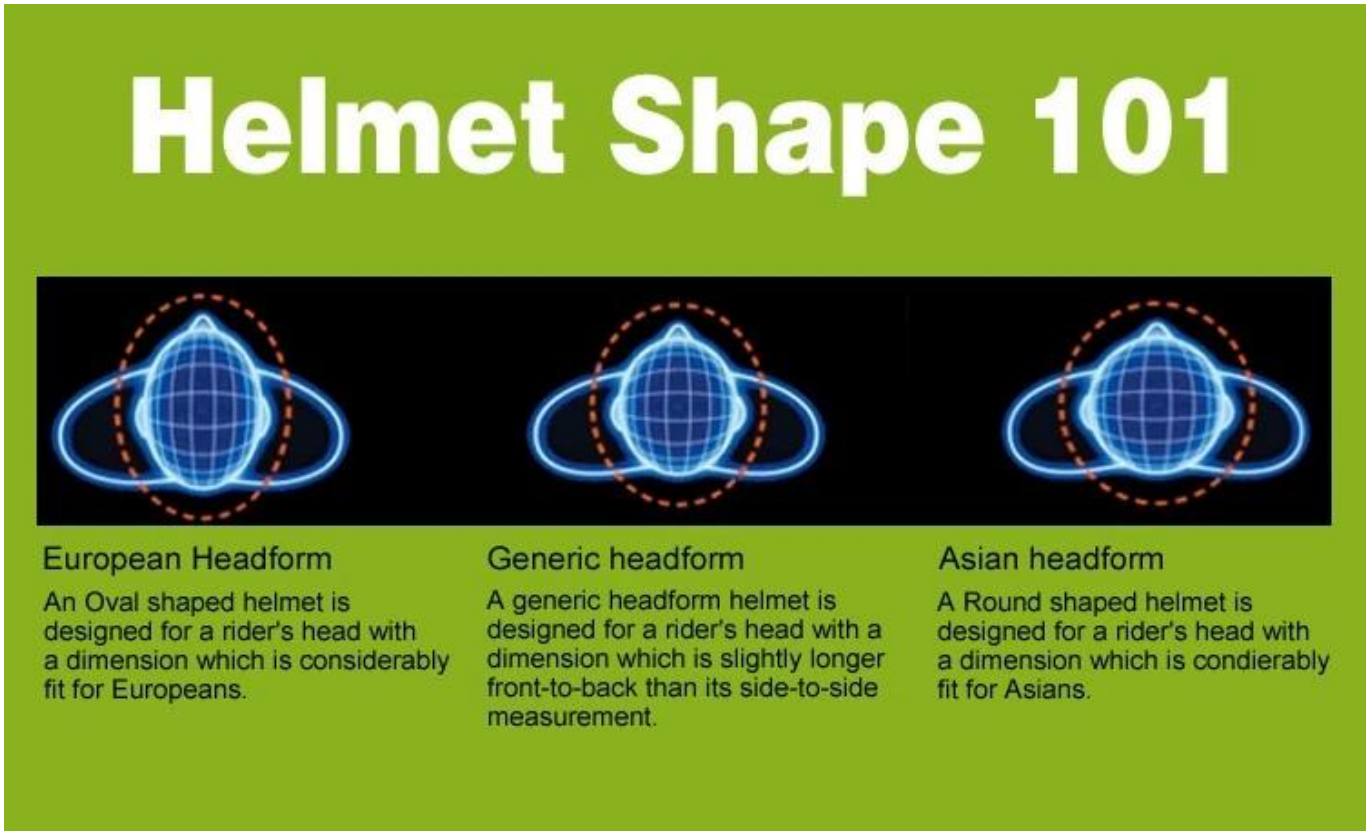
Helmet Shape 101
European Headform
An Oval shaped helmet is designed for a rider's head with a dimension which is considerably fit for Europeans.
Generic headform
A generic headform helmet is designed for a rider's head with a dimension which is slightly longer front-to-back than its side-to-side measurement.
Asian headform
A Round shaped helmet is designed for a rider's head with a dimension which is condierably fit for Asians.

□□□ □□□ □ :

□□ □□□ □□□□ □□, □□□ □□□□ □□□ □□ □□□□□□□, □□ □ □□□ □□□□□ □□! □□ □□□□ □□□□ □□ □□ □□□ □□□□ □□ □□□ □□ □□□□ & A □□□□□; □□ □ □□! □□□ □□ □□□ □□□ □□□ □□□ □□ □□ □□□ □□ □ □ □□□□ □□□□ □□□ □□ □ □ □□□□ □ □□□, □□ □□□ □□ □ □□□ □ □□□□□!

□□:

□□□ □□□□□□□ : □□□ ISO9001, □□ □□, CE □□□ □□□, □□□ □□□ □□ □□□ □□ □ □ □□□ □□ □□□ □□□ □□ □□□ □□□□

CERTIFICATE

[illegible] :

[illegible] 15 [illegible]. [illegible] R & A, [illegible] D [illegible], [illegible] [illegible].

CUSTOMIZE FOR BRAND

Logo style: Dome,Metal,UV-Dart sticker,Water decal..

□□ □□ □□□ □□□ □□ :

□□ □□□ → PC □□ □□ → PC □□ □□ → □□ □□□ □□□ → □□ □□ □□□ □□ EPS □□ → EPS - □□ □□ → □□ □□ □□□ → □□ □□ → - □ □ □□ → □□ □□ □□ → □□□ - □□ □□ → IQC □□ → □□ □□ → □□ □□ □□ → □□□□ □□ □□□ → □□ □□ →□□ □□ → □□ → □□ → □□ □□□.

Production Procedure
AURORA
1
Silk screen
2
PC blister tooling
3
PC blister manufacture
4
Trmming dug hole
5
Eps raw material by different density
6
EPS in-mold tooling
7
Helmet in-mold workshop
8
In-mold machines
9
In-mold tooling
10
In-mold producing process
11
semi-finished In-mold helmet
12
IQC inspection
13
Helmet grinding
14
Inner padding production
15
Plastic injection workshop
16
Assembly line
17
Inside labeling
18
Packing
19
Warehourse
20
Installed counters

□□ □□ :

□□ □□, □□□□ & A; □□ □□□ □ □□□ □□ □ □□□! □□□ □□□ □□□ & A □□□ □□ □□ □□□ □□□ □ □□□□; □□□ □□□ □□ □□ □□□ □□ □ □□□! □□□ □□ □□ □□ □□ & A□ □□□□ □□□ □□; □□ □□□□, □□□ □□ □□□ □□□□ □□□ □□ □□□ □□□ □□□! □□□ □□, □□ □□ □□□ □□ □□ □□ □□□□!

SHIPPING