

星尘 AU-H07 产品规格

星尘 AU-H07 产品规格 :

- 星尘 AU-H07 产品, 材质为 ABS 塑料.
- 产品采用 EPS 泡沫包装.
- 认证 : CE EN1384, VG1 符合 ASTM 标准.

星尘 stardust 产品规格 :

| | |
|---------|---|
| 产品型号 | AU-H07. |
| 材质 | ABS 塑料. |
| 包装 | 泡沫包装, 纸箱 |
| 认证 | CE EN1384, VG1 符合 ASTM. |
| 尺寸 / 重量 | 尺寸: 52, 53, 54, 55, 56, 57, 58, 59, 60, 61; |
| 重量 | 约 100g, 重量误差 ± 5% |
| 颜色 | 白色 |
| 起订量 | 3-7. 起订量 520 |
| MOQ | 520pcs. |
| 包装 | 每盒 9 个, 每箱 9 盒 |
| 尺寸 | 每盒尺寸: 32 * 53.5 * 67.5 cm. |

星尘 AU-H07 产品规格 :









000 000000 00 000 0000 00

000000 00 0000 0000 000 0000 000 0000 000 000 000 0 FT0 0000 3 00 00 0000 00 0 0000 000 0000 0000 0000 0000.



UNRIVALLED ADJUSTMENT FOR OPTIMUM COMFORT

Progressive adjusting system allows the helmet to perfectly and user-friendly fit on the rider's head, guaranteeing the crucial advantage in terms of safety and wearer comfort with 3 functional performance.



Il sistema di regolazione progressiva

permette al casco di adattarsi perfettamente e in modo user-friendly alla testa del cavaliere, garantendo il vantaggio cruciale in termini di sicurezza e comfort del portatore con 3 prestazioni funzionali.

Il sistema di regolazione progressiva



ADVANCED MASS VENTILATION SYSTEM

Aerodynamic ventilation channels provide high standards of cooling airflow, taking away the hot air of the inner fabrics to improve the rider's physiological comfort.



UtilitySuni Protection.

UtilitySuni Protection is a helmet designed for maximum safety and comfort. It features a wide peak for sun protection and a robust ABS injection-molded shell for durability.




UTILITY SUN PROTECTION

Novelty designed to provide adequate sun protection for the rider, the wide peak protects the skin against weather damage, while ensuring maximum visibility. Engineering ABS injection peak is assured from any deformation.

00 00 00

0 000 000 00 00 0000000 000 000 000 00 00000 000 00 00000000.

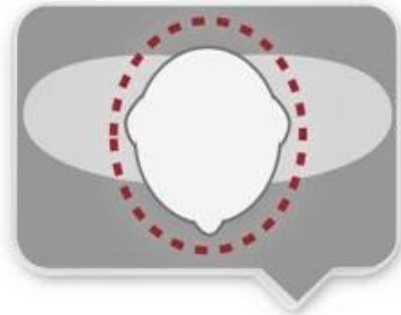

INDIVIDUAL FIT HEAD FORM

A long oval shaped head form is designed for a rider's head with a dimension which is considerably fit for Europeans.

Packagaing 00

00 0 00 : 9 0 / 00

0000 00 : 00 00 : 67 * * 31.5 52.5 cm

0 00 : 4.80kg.

00 00 : 1pc / pp 00 Wth 00 00, 00 00000 9 DC

00 0000 00 00 00 00000000 0000 00 :

00 00 00 :

0000 0000 00 0000 0000 0000 00 00000000. 00000000.

00 00 00 :

00 00 0000 0000 0000 00 00 00000 00 0 0000 0000 00 0000 0000 00000000.

0000 00 0 :

0000 0000 000000 0000000 0000 0000 00 00000000. 0000 00 000000.



0000 0000 0000 :

0000 00000 00 0000 0000 00 0000 00 0000 000000000, 0000 00 0000 00 0000 00000 00 00 0000 000000! 0000 00 00 0000 00000 EN1078, EN397, EN12492, EN1384, VG1 CPSC, 0000 00 00 00 0 3 0 00 00000 00 0000 00000 0000 0000 00000000. 00 00!

Our In-house Testing Lab



□□:

□□□□ □□□□□□□□ : ISO9001, □□□□ □□ □□, CE □□□□ □□□□ □□□□ □□ □□□□ □□□□ □□□□ □□□□ □□□□ □□□□ □□□□ □□□□.

CERTIFICATE / AUTHENTICATION



□□ □□ □□ □□ □□□□□.

□□ □□ → PC □□ □□ → PC □□□□ □□ → □□□□ □□□□□□ → EPS □□ □□ □□ □□ □□ → □□ □□□□ EPS. → □□□□ □□□□ □□ → □□ □□□□
 → □□ □□ → □□□□ □□ □□ → □□□□ □□□□ □□ → IQC □□ → □□, □□□□ → □□□□ □□ □□ → □□□□ □□ □□□□ → □□ □□ → □□ □□ → □□ →
 □□ → □□□□ □□□.

