

CE EN1384/PAS 015/ASTM 认证 认证 认证, 认证 认证 认证

认证 认证 认证 认证

认证 认证 认证 认证 认证 认证 认证 认证:

-认证 & 认证 认证;

-认证 认证 认证 认证 bs 认证.

-认证 EPS 认证 认证, 认证 认证 认证 认证 认证;

-认证 认证 认证 认证;

-认证 认证: 认证 认证 认证 认证 认证 认证 认证; 认证 认证 认证;


认证: 认证 认证 认证 认证 认证

认证 认证 认证 认证 认证:

认证 认证.	h07
认证	bs 认证 + 认证 eps, 认证 认证 认证
认证	认证 VG1 & 认证 EN 1384:2017; astm; PAS 015
认证	17
认证 认证 认证 认证 认证	xxs-S (51-55cm); S-M (55-57cm); M-L (57-59cm); L-XL (59-61cm)
认证	认证 认证 认证 认证 认证 认证 认证 认证 认证; 认证 认证 认证.
认证	pantone
认证 认证	3-7 认证 认证
moq	500 pc
认证 认证	认证 认证: 认证 认证 认证 认证
	认证 认证: 9 PCs/认证 认证 认证: * 32 * 53.5 67.5 CM

认证 认证 认证 认证 认证 认证 认证 认证:

认证 认证 认证 认证 认证 认证 认证 认证 认证 认证 认证 认证 认证 认证 认证.

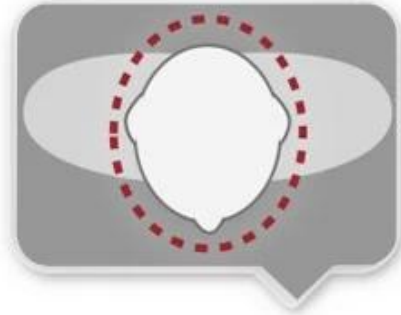

A long oval shaped head form is designed for a rider's head with a dimension which is considerably fit for Europeans.

A diagram illustrating the adjustment of the seat backrest angle. It shows a black lever with a circular dial in the center. Two green curved arrows indicate the range of motion for the backrest, from a more upright position to a more reclined position. The lever is attached to a grey structural component.

Progressive adjusting system allows the helmet to perfectly and user-friendly fit on the rider's head, guaranteeing the crucial advantage in terms of safety and wearer comfort with 3 functional performance.





FRIENDLY DESIGN FOR WOMEN PONYTAIL

Considerate rear space ensures your braid, rope or bun hairdos look good with a helmet, keep hair from slipping and getting in your face while you're riding and allow your hairstyle fit snugly under helmet. It still looks good when the helmet comes off.

- 1) 透气 透气 透气 透气。
- 2) 透气 透气 透气 透气 **wicking** 透气 透气 透气。
- 3) **breathable** & 透气 透气 & 透气 透气 透气

透气 透气 透气 透气 透气 透气 **breathable** 透气 透气 透气, 透气 透气 **wicking** 透气 透气 透气 透气。 透气 透气 透气 透气 透气 透气 透气 透气 透气 透气。



A black, dome-shaped helmet with a textured, woven surface. It features a central vertical seam and a small white rectangular opening at the bottom. The helmet is shown from a top-down perspective.



Novelty designed to provide adequate sun protection for the rider, the wide peak protects the skin against weather damage, while ensuring maximum visibility. Engineering ABS injection peak is assured from any deformation.











□□ □□

□□ □ □□: 9 pc □□ □□

□□□ □□: □□ □□: 67 * * 31.5 52.5 CM

□ □□: 4.80 kg

□□□ □□: 1pc/PP □ □ wth □□ □□, □□ □□□□ 9 DC

□□ □□□ □□ □□ □ □□□ □□:

□□ □□ □□:

□□□ □□ □□□ □□ □□ □ □□□ □□ □□□ □□□ □□ □□□ □□ □□□□ □□.

headform □□:

□□□□ □□ □□□ □□ □□□ □□ □□ □□□ □□□ □ □ □□□ □□ □□□ □□□ □□ □□□ □□.

□□□ □□ □□:

□□□ □□□ □□□□ □□ □□ concerably □□, □□□ □□ □□□ □□□ □□ □□□ □□ □□□□ □□ □□□.



□□□ □□ □□□:

□□ □□□ □□□□ □□ □ □□□ □□ □□ □□ □□□ □□ □□□□, □□□ □□□ □□□ □□□ □□ □□□ □□ □□ □□□ □□□ □□ □□! □□□ □□ □ □□ □□ □□□□ EN1078, EN397, EN12492, EN1384, VG1 cpsc, □□ □□, □□□ □□ □□ □□□. □□□ □□ □□ □□ □□ □□□ □□□ □□□ □□, □□ □□□ □□ □ □□□ □□ □□□ □□ □□□□!



11

[illegible]

CERTIFICATE / AUTHENTICATION



□□ □□□ □□□□ □□ □□:

□□ □□ → PC □□ □□ → PC □□□ □□ → □□□ □□□ □□ → EPS □□ □□□□ □□ □□ → □□ □□ EPS → □□□□ □□□ □□ → □□□ □□ → □□ □ → □□□ □□ □□ → □ □□ □ □□□ □□ → iqc □□ → □□, □□ → □□□ □□ □□ → □□□□ □□ □□□ → □□ □□ → □□□□ □□ → □□ → □ □□ □□□.



□ □□□ □□ □□□□?

-□□□ □□ □□□ □□ □□□

□: □□□ □□ □□ □ □□□ □□□□

oem □ odm: □□□ □□□ □□ □□□ ODM □□□□ □□ □ □ □□□□

□□ □ □□ □: □□□ □ □□ □□□□ □□□ □□□

□□: □□□ □□□ □□□ □□□ □□□□. □□□□ tion, □□ □□□ □□ □

□□: □□□ □□□□ □□ □□□ □□□ □□ □□□

□□□: □□ □ □□ □ □□□, □□□ □□

With strict quality management system and first-class products

We can provide OEM and ODM service for customers

With professional and strong technical development team

We have our own
production line, to reduce
the price to a minimum

We constantly
introduce patented
technology products

Perfect after-sales service, so customer satisfaction

Turn your idea into a custom concrete product!



11 11

internatioanl 00, 00 00 & 00 000 00000 00 00 00 0 00! 0000 0000 0000 00 0000 0000 00 00 0000 00 0000 0000 0 0 0
00! 00 0000 00 00 00 0 0000 0000 00 00 00, 00 00 00 0000 0000 00 00 00 00 00! 0000 00, 0000 00 0000 0000 00 00 00 0
0000!

11